




## ROTARY MOWER ON SKIDS

**LF SERIES**

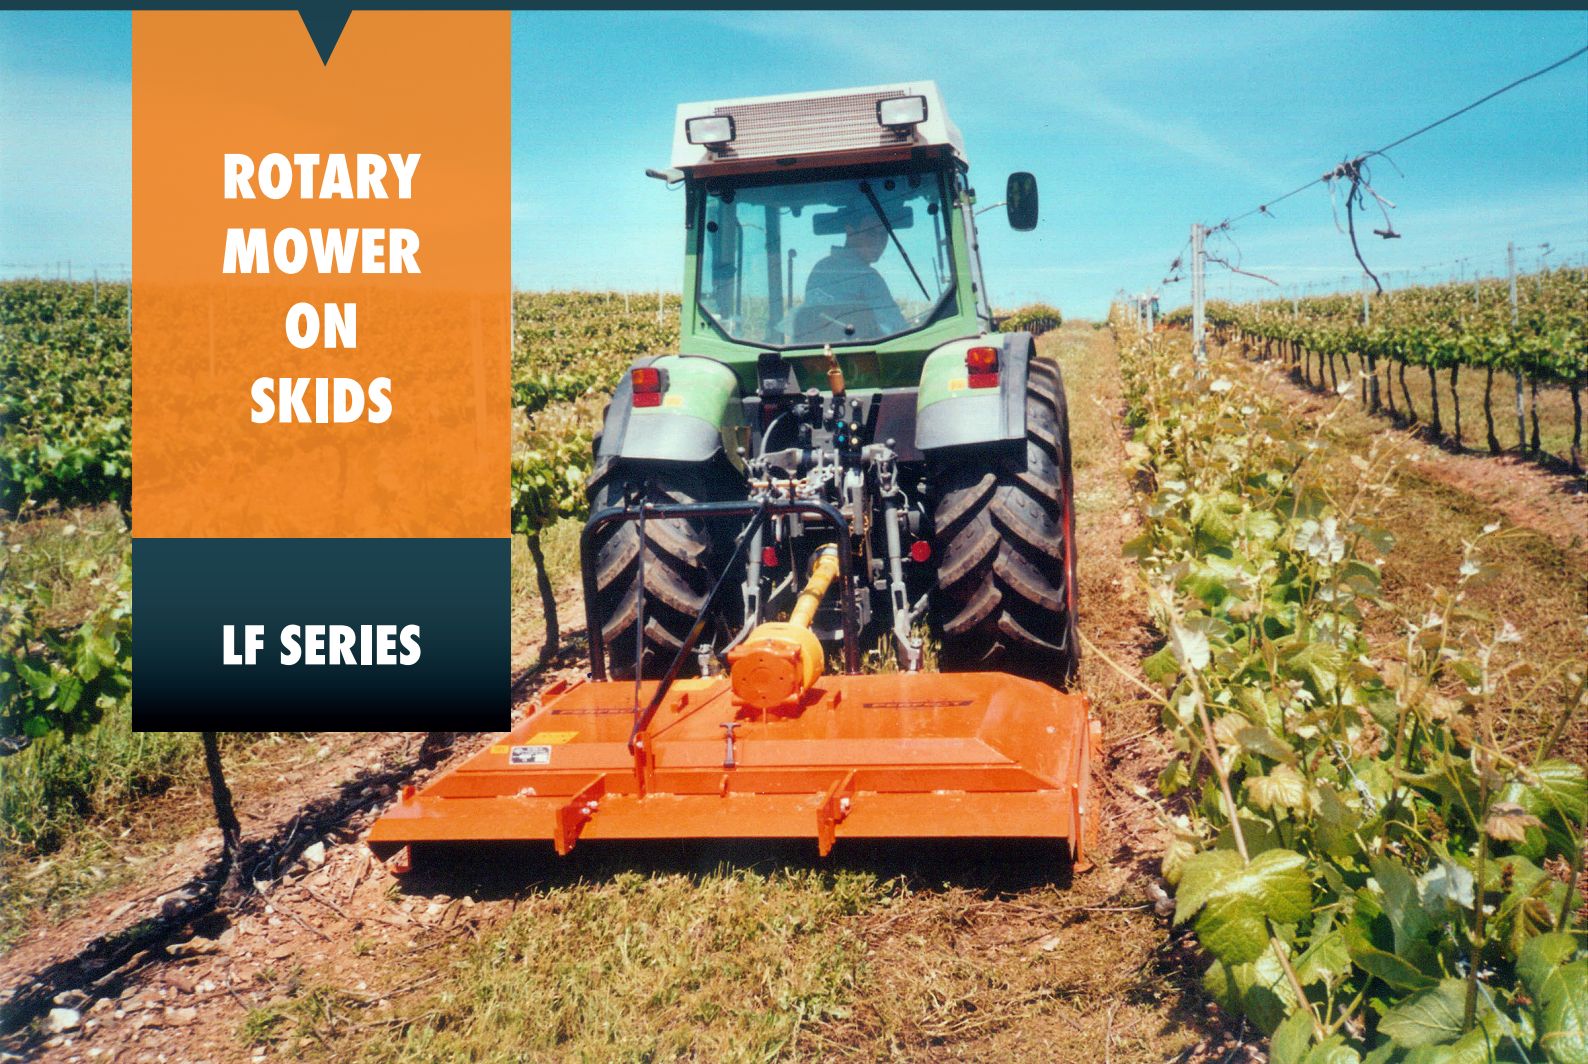

### **IDEAL FOR A WIDE RANGE OF GRASS CUTTING JOBS**

The simple but very sturdy construction of these machines makes them ideal for grass cutting in orchards and vineyards, as well as for maintenance of estates, airfields, parks, camping sites etc.

*Simple but reliable solution for maintenance of grass.  
Excellent cut en long lifespan*





SERIE LF

# Rotary mower on skids



LF-type Rotary Mowers have long, rounded skids at both sides to allow for fast working speeds (up to 8-10 km/h = 6-6,5 mph).

All generously overlapping cutting blades are driven indirectly by means of V-belts, mostly with automatic springloaded belt tensioners. This flexible drive system protects the gearbox from shock loads.



## EXTRA'S

- Rear roller
- Support saucers
- Parallelogram-type offset feature, manual or hydraulic
- "Perfect" pulling type headstock for front mount
- Double headstock for front and rear mount
- 4 rubber wheels 4.00 x 4

## OFFSET SYSTEM

For easy conversion from transport to offset position the LF Rotary Mowers come as standard with a simple offset system. (Except for LF-140).

A hydraulic offset feature is available as an option.

TECHNICAL SPECIFICATIONS	LF-140	LF-185	LF-215	LF-245	LF-275	LF-360
Cutting width (cm/inch)	140 / 4'7"	185 / 6'1"	215 / 7'1"	245 / 8'1"	275 / 9'0"	360 / 11'10"
Min. power required at 50 rpm of pto (kW/HP)	18 / 25	21 / 28	24 / 32	28 / 38	32 / 42	39 / 50
Number of blades	2	2	3	3	3	4
Total width (cm/inch)	149 / 4'11"	194 / 6'4"	224 / 7'4"	254 / 8'4"	284 / 9'4"	374 / 12'3"
Cutting height (cm/inch)	4-14 / 1½-5½"	4-14 / 1½-5½"	4-14 / 1½-5½"	4-14 / 1½-5½"	4-14 / 1½-5½"	4-14 / 1½-5½"
Length of rear roller (cm/inch)	53 / 21"	53 / 21"	95 / 37"	95 / 37"	95 / 37"	162 / 64"
Max. offset from centre of tractor	-	140 / 4'7"	155 / 5'1"	170 / 5'7"	185 / 6'1"	230 / 7'7"
Parallelogram-type offset (option)	-	133 / 4'4"	148 / 4'10"	163 / 5'4"	178 / 5'10"	223 / 7'4"
Weight (kg/lbs)	325 / 715	360 / 794	430 / 946	465 / 1020	520 / 1144	670 / 1474

As our policy is one of continuous improvement, we reserve the right to change the specification or to modify the design without prior notice



Van Wamel B.V.

Van Wamel B.V.  
Energieweg 1, 6658 AE  
Beneden Leeuwen  
The Netherlands

+31 (0) 487 59 29 44  
+31 (0) 487 59 29 44  
@ www.perfectvanwamel.com  
perfect@vanwamel.nl

Your PERFECT dealer